

**Important:** Throughout the spring and summer seasons our we do quote submissions on a first come first serve basis and work hard to do them right the first time. We believe in honoring our commitment to each customer that requests a quotation, therefore we can not consider demands for immediate quotations. We will generally be able turn quotations in about 2-3 days. During peak season we will require up to 3-4 days to do a quotation.

### Basic Information

**Step 1.**

**First Name:**  **Last Name:**

**City of Installation:**  **State:**

**Contact Tel. #**  **Email Address:**

*(We do not call unless your email address is entered incorrectly)* *(We have never sold or exchanged your email addresses or other information with any other company!)*


### Load Requirement Information

**Step 2.** Your city building department is where building permits are issued from. You may or may not need an actual permit for your installation, and this is left as the sole responsibility of the homeowner. ***It is our strong recommendation that you acquire your permit prior to purchase.*** However, panel thickness, beam placements, beam size, distance between posts out front... all are a function of the load (**snow & wind**) that your cover will be subject to. Even though you may not require a permit, you will still need to contact them to get your local building code requirements so that we can supply you with the 'correct' materials!

**Snow Load (lbs./sq.ft.):**  **Will you be getting a permit?**

**Wind Load (mph):**  **YES**  **NO**

### Our Terminology

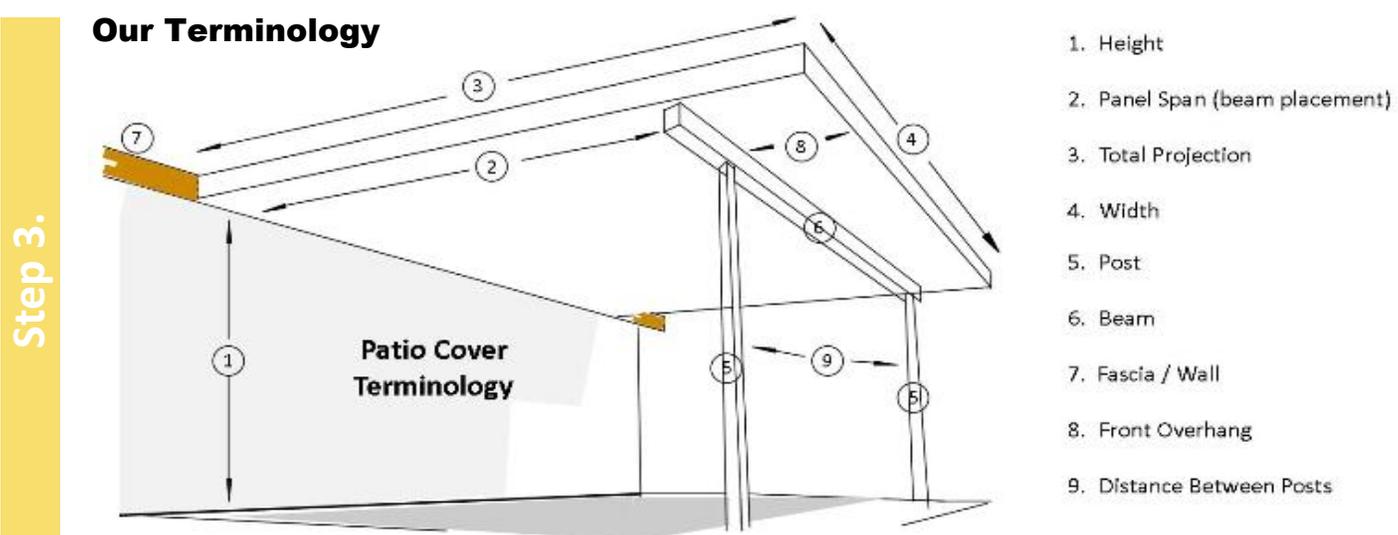

### Patio Cover Details

Step 4.

**Top Only**   
(Beam & Posts  
NOT Included)

**Complete Cover**   
(Full set of Beam  
& Posts Included)

**Free Standing**   
(2 Full Sets of Beam  
& Posts Included)

**Height on House Wall or Fascia Board:**  
From deck to the underside of roof installation point

ft.  in.

**Projection:**  ft.  in.

Total distance away from wall...  
*including overhang past front beam & post assembly.*

**Width:**  ft.  in.

Total distance parallel to house wall...

**Desired Front Overhang:**  ft.  in.

Amount of awning past the front beam & post assembly. Max overhang is 3' or 25% of awning span - *whichever is less.*

Choose one...

**Posts attached to wood/trex deck**

**Posts attached to cement pad**

**Posts buried / cemented in ground**

### Color Selection

Step 5.

#### Roof Panel Color Selection

White  Ivory



#### Fascia Gutter Color Selection

White  Bronze  Clay  Ivory  Gray  Brown

#### Beam Color Selection

White  Bronze

#### Post Color Selection

White  Bronze  Ivory

Step 6.

### SEND QUOTE REQUEST TO:



quote@homeporchandpatiokits.com



1.705.259.2264