



# Door Canopy Hat Section Assembly Instructions

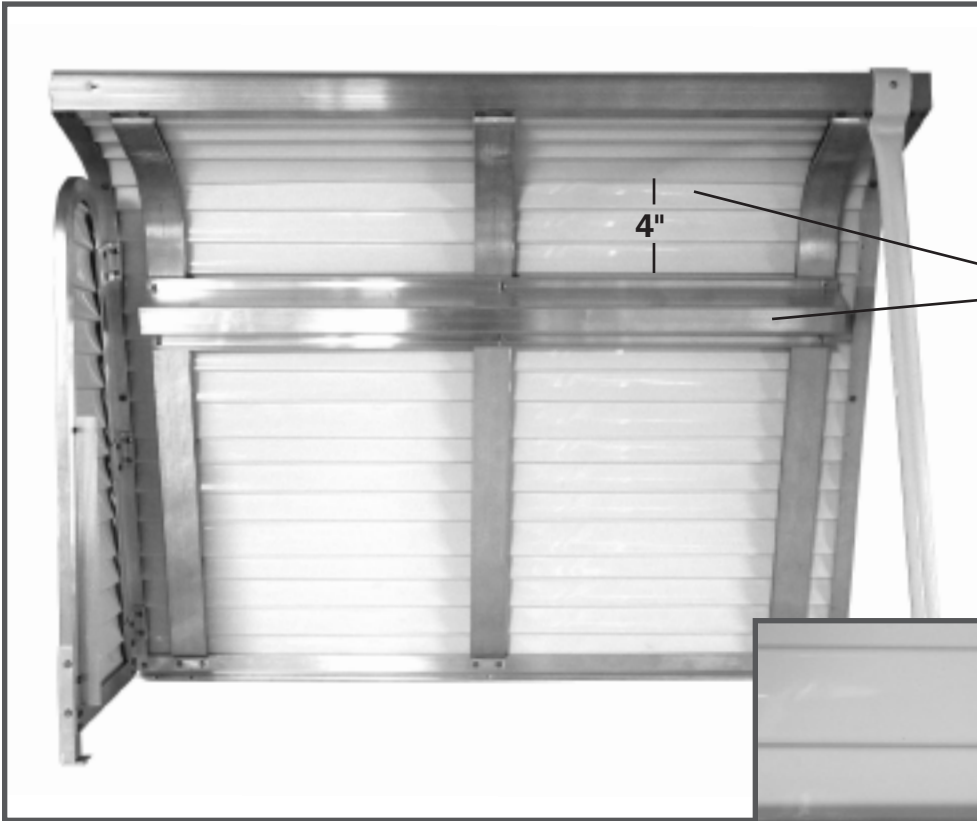


Please install the hat section after you have completely installed your door canopy.

- 1)** Place door canopy with underside facing up.
- 2)** Place hat section approximately 4" before the bend of the door canopy.

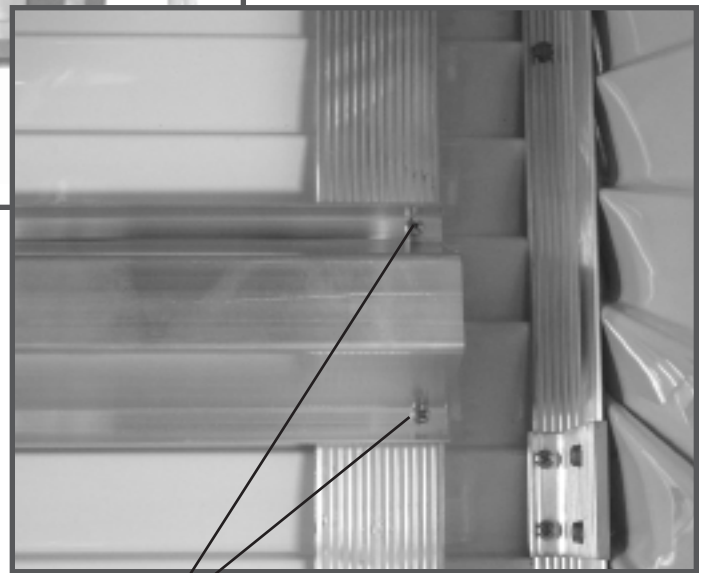

- 3)** Drill holes using 1/8" drill bit. Two holes per rafter. One on each side of the "hat".

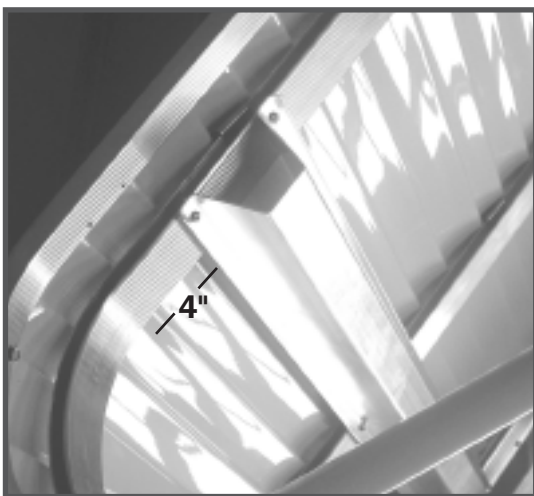

The hat section should be flush on each end of the outside rafters.

**Note:** If using optional sidewings install sidewings prior to installing hat section.

