

**Important:** Throughout the spring and summer seasons our we do quote submissions on a first come first serve basis and work hard to do them right the first time. We believe in honoring our commitment to each customer that requests a quotation, therefore we can not consider demands for immediate quotations. We will generally be able turn quotations in about 2-3 days. During peak season we will require up to 3-4 days to do a quotation.

### Basic Information

**Step 1.**

**First Name:**  **Last Name:**

**City of Installation:**  **State:**

**Contact Tel. #**  **Email Address:**

*(We do not call unless your email address is entered incorrectly)* *(We have never sold or exchanged your email addresses or other information with any other company!)*

### Load Requirement Information

**Step 2.** Your city building department is where building permits are issued from. You may or may not need an actual permit for your installation, and this is left as the sole responsibility of the homeowner. ***It is our strong recommendation that you acquire your permit prior to purchase.*** However, panel thickness, beam placements, beam size, distance between posts out front... all are a function of the load (**snow & wind**) that your cover will be subject to. Even though you may not require a permit, you will still need to contact them to get your local building code requirements so that we can supply you with the 'correct' materials!

**Snow Load (lbs./sq.ft.):**


**Will you be getting a permit?**

**Wind Load (mph):**

**YES**

**NO**

### Our Terminology

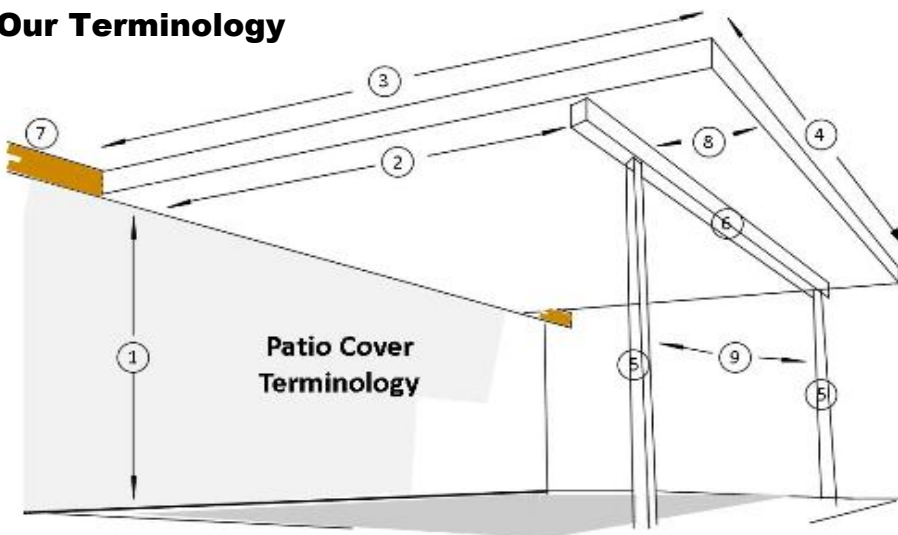

1. Height
2. Panel Span (beam placement)
3. Total Projection
4. Width
5. Post
6. Beam
7. Fascia / Wall
8. Front Overhang
9. Distance Between Posts



request@homeporchandpatiokits.com



1.705.259.2264

# Request for Quotation

## Insulated Patio Covers

Step 4.

**Top Only**   
 (Beam & Posts  
NOT Included)

**Complete Cover**   
 (Full set of Beam  
 & Posts Included)

**Free Standing**   
 (2 Full Sets of Beam  
 & Posts Included)

**Projection:**  ft.  in.

Total distance away from wall...  
including overhang past front screen wall.

**Width:**  ft.  in.

Total distance parallel to house wall...  
including overhang past side screen walls.

**Desired Front Overhang:**  ft.  in.

Amount of awning past the front beam & post assembly. Maximum  
 overhang is 3' or 25% of awning span - whichever is less.

**Height on House Wall or to Bottom of Fascia Board:**

ft.  in.

From deck to the underside of roof installation point

**Posts attached to cement pad**

**Posts attached to wood/Trex deck**

**Posts buried / cemented in ground**

**Option:**

You can have a 2" x 3" T5 Alloy fan beam  
 installed in the center length of one (or  
 more) roof panels to hang a ceiling fan or  
 run lighting wires.

**Fan Beam Installation**

**How Many?**

**Roof Panel Colors**

White

Wheat

Sand

Eggshell

Note: 2' wide roof  
 panels are only  
 available in white.



Step 5.

**Side Fascia & Front Gutter Color Selection**

White

Clay

Bronze

6" thick roof comes with white  
 aluminum drip edge fascia only



**Beam Color Selection**

White

Bronze

**Post Color Selection**

White

Bronze

Ivory

Step 6.

**SEND QUOTE REQUEST TO:**



quote@homeporchandpatiokits.com



1.705.259.2264